

RBU, for angle grinders

Suitable for medium-duty brushing such as derusting, cleaning of weld seams and light deburring work.




Advantages:

- Suitable for use on angle grinders up to 80 m/s.
- Highly flexible, enabling optimal adjustment to the workpiece contour.
- Creates fine surfaces.

Recommendations for use:

- For optimum results, use on speed-adjustable angle grinders.

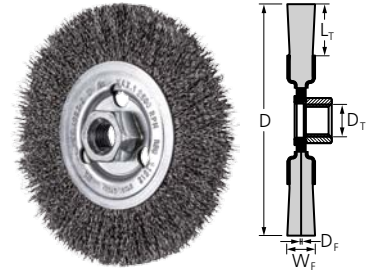

| D [mm] | W _F [mm] | L _T [mm] | D _T | D _F [mm] | Packaging | Opt. RPM | Max. RPM | Description |
|------------------------------------|---------------------|---------------------|----------------|---------------------|-----------------|--------------|----------|-----------------------------|
| | | | | | EAN 4007220 | | | |
| Steel wire (ST) | | | | | | | | |
| 115 | 12 | 25 | M14x2 | 0.30 | 806968 | 6,300–12,500 | 12,500 | POS RBU 11512/M14 ST 0,30 |
| 125 | 12 | 15 | M14x2 | 0.30 | 806975 | 5,500–11,000 | 11,000 | POS RBU 12512/M14 ST 0,30 |
| Stainless steel wire (INOX) | | | | | | | | |
| All INOX brushes are degreased. | | | | | | | | |
| 115 | 12 | 25 | M14x2 | 0.30 | 806982 | 5,000–12,500 | 12,500 | POS RBU 11512/M14 INOX 0,30 |
| 125 | 12 | 15 | M14x2 | 0.30 | 806999 | 4,400–11,000 | 11,000 | POS RBU 12512/M14 INOX 0,30 |

RBU, POLISCRATCH

Excellent for processing and removing soft materials such as underseal and anti-drumming compound. Ideally suited to achieving rough, like sandblasted, surfaces due to the specific geometry of the filament material.



Recommendations for use:


- Use only on speed-adjustable angle and straight grinders.
- Can be resharpened up to 10x. To do so, press the wire tips onto a sharpening block for around 2–3 seconds. Change the running direction to sharpen the tool.

PFERDVALUE:



Advantages:

- High cooling effect and no smearing or loading of the brush due to the open construction of the filament material.
- Longer tool life as the brush can be resharpened using a sharpening block.



| D [mm] | W _F [mm] | L _T [mm] | D _T | D _F [mm] | Packaging | Opt. RPM | Max. RPM | Description |
|------------------------|---------------------|---------------------|----------------|---------------------|-------------------|-------------|----------|------------------------------|
| | | | | | 5x EAN 4007220 | | | |
| Steel wire (ST) | | | | | | | | |
| 100 | 20 | 18 | M14x2 | 0.60 | 892459 | 1,200–3,500 | 6,000 | POS RBU 10020/M14 SC ST 0,60 |



Arbor BO 8/M14
 (EAN 4007220900482)

Safety note: Exclusively for use with POLISCRATCH brushes.

For more information:

Detailed information on accessories can be found on pages 55 and 56.